

CROSS-Q WITH OVERLAPPING SQUARES

Large, variously assembled, rectangular tubes are used to produce CROSS-Q.

Innovative radiators thanks to 90° corners and strong geometric shapes (squares and

rectangles) sitting on top of each other or interwoven.


DIMENSIONS

Width: 48/56/64/100/116 cm

Height: 48/56/64/184/208/224/228 cm

Depth: 6 cm

Depth from wall: 10 cm

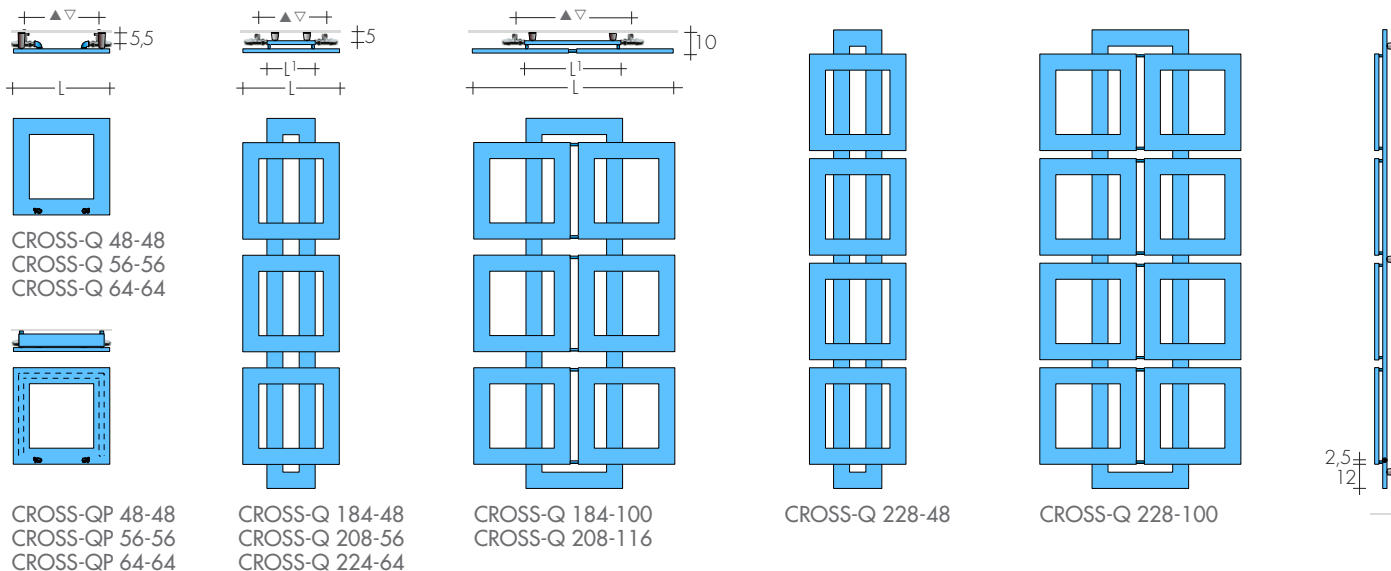

MODEL

MODEL	HL cm	white sablé standard €	EN 442 Δt 50 K watt	$\blacktriangle \nabla$ t.c. •cm	Height H (Hi) cm	Width L (Li) cm	Weight M Kg	Volume V dm ³	MIXED VERSION cl.II E.H.E. with sleeve W	€
CROSS-Q	48-48	291,70	176	34	48	48	3,5	2,1	-	-
CROSS-QP	48-48	377,10	272	34	48	48	5,7	3,2	250	104,20
CROSS-Q	56-56	320,80	211	42	56	56	4,1	2,5	250	104,20
CROSS-QP	56-56	409,00	326	42	56	56	6,9	3,9	400	106,20
CROSS-Q	64-64	341,00	246	50	64	64	4,8	2,9	250	104,20
CROSS-QP	64-64	428,30	381	50	64	64	8,1	4,5	400	106,20
CROSS-Q	184-48	1012,90	890	37	184 (160)	48 (24)	18,7	11,3	900	117,00
CROSS-Q	184-100	1648,60	1442	61	184 (160)	100 (48)	30,2	18,3	1500	133,20
CROSS-Q	208-56	1062,70	1055	37	208 (184)	56 (24)	22,1	13,4	-	-
CROSS-Q	208-116	1739,10	1689	61	208 (184)	116 (48)	35,4	21,5	1500	133,20
CROSS-Q	224-64	1113,30	1203	37	224 (200)	64 (24)	25,2	15,3	1200	124,00
CROSS-Q	228-48	1221,10	1119	37	228 (204)	48 (24)	24,0	14,6	1200	124,00
CROSS-Q	228-100	2062,00	1818	61	228 (204)	100 (48)	39,1	23,7	-	-

*Reverse Brem valves

Digital Thermostat p.243

STANDARD PRODUCTION

White "sablé" paintwork - White M4 brackets

Tolerance ± 3 mm - Air vent $\varnothing 1/8"$

MAXIMUM OPERATING PRESSURE 4 BAR

PRODUCTION ON REQUEST

Paintwork to Brem color list (chrome-plated brackets)

+15/25%

Special fittings, page 292-293

STANDARD FITTING

REG $\varnothing 3/8"$

BREM valves, page 294

Electric version e.Cross-Q, p.252

